



**MITSUBISHI
ELECTRIC**

Changes for the Better

DIGITAL COLOR PRINTER



ISO9001
JQA-0521

Full-Featured Compact Printer

High Speed Digital Photo Printer for Premium Quality Prints
Ideal for Photobooth & Event Photography



MODEL
CP-K60DW-S

Multiple Print Sizes

Prints: 2" x 6", 3.5" x 5",
4" x 6", 5" x 7", 6" x 6"
and 6" x 8"

Social Media Print Support

6" x 6" print size
supports 1:1 aspect
ratio for Instagram

Matte or Glossy Finish

Provides various texture
print finish similar to
Satin finishes

Ink Rewind & Rollback

Maximize media
usage, reduce waste and
operation costs

Compact and Lightweight

Easy set-up, integration,
and transport, ideal for
various applications

Quality and Reliability

CLEAR, HIGH-QUALITY IMAGES.

Newly developed image processing circuits enable smooth, natural images. Sharp, high-quality printed images are produced with little or no color bleeding. Matte-finish prints are also available for a softer, less glossy finish. This provides beautiful, natural colors with a soft finish.



INK REWIND & ROLL BACK FUNCTION

The new rewind function optimizes 3x5 & 4x6 prints by maximizing media usage reducing waste - saves operator cost.


4-PAGE MEMORY

Stores up to four 4" x 6" images. Enabling faster print throughput.

ENERGY-SAVINGS

Saves energy in sleep mode, reducing power consumption less than 1 watt. Saving over 90%* less power.

Power consumption during sleep mode.



*Comparison based on standard values of CP9810DW model printer

FRONT LOADING MECHANISM


Designed for quick and easy front access for consumables. Quick and intuitive, non-complicated paper and ink ribbon installation.



DUST PROTECTION AND COOLING

A separator is used to distribute airflow separately to the power supply and thermal head. Efficient air cooling not only improves throughput but also boosts internal air pressure to prevent dirt or dust from entering from the front of the printer.

Air-cooling mechanism cross-sectional view

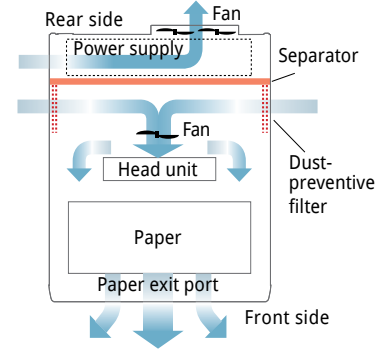

Specifications

Model Name	CP-K60DW-S				
Printing Method	Dye sublimation thermal transfer full color. Three-color face progressive printing (yellow, magenta, cyan) and surface lamination				
Gradations	256 gradations (8 bits per color, approx. 16.7 million colors)				
Print Resolution	300 x 300 DPI				
Capacity	2" x 6"	640 prints max.			
	3.5" x 5"	360 prints max.			
	4" x 6"	320 prints max.			
	5" x 7"	180 prints max.			
	6" x 6"	160 prints max.			
Printing Time ^{*1}	Print Modes	Fine	Ultra Fine	Matte (Fine)	Matte (Ultra Fine)
	2" x 6" (x2)	Approx. 11.4 sec	Approx. 20.5 sec	Approx. 15.1 sec	Approx. 23.5 sec
	3.5" x 5"	Approx. 10.5 sec	Approx. 18.8 sec	Approx. 13.3 sec	Approx. 21.5 sec
	4" x 6"	Approx. 11.4 sec	Approx. 20.5 sec	Approx. 15.1 sec	Approx. 23.5 sec
	5" x 7"	Approx. 19.9 sec	Approx. 36.0 sec	Approx. 26.0 sec	Approx. 41.3 sec
	6" x 6"	Approx. 18.5 sec	Approx. 32.2 sec	Approx. 23.7 sec	Approx. 32.3 sec
6" x 8"	Approx. 21.9 sec	Approx. 39.9 sec	Approx. 30.0 sec	Approx. 45.8 sec	
Interface	Hi-Speed USB Ver. 2.0				
Driver Software ^{*2}	Windows®XP/Vista/7/8 32-bit ,Windows®Vista/7/8 64bit ,MacOS®10.5/10.6/10.7/10.8				
Memory Size	32 MB - 4 pictures (4" x 6" size)				
Dimensions WxDxH ^{*3}	Approx. 10.8" x 17.6" x 6.7"				
Weight	Approx. 26.5 lbs (12kg)				
Power Supply	120VAC 50/60Hz, 220-240VAC 50/60Hz				
Power Consumption	4.6A (120VAC 50/60Hz), 2.4A (220-240VAC 50/60Hz)				
Accessories	Paper flange (1), paper flange spacer (1), Ink cassette (1), paper strip bin(1), AC power code (220-240V), CD-ROM (1) ,Quick setup guide (1), cable ties (2), securing band, screws, washer (1)				

Model Name	Description	Print Size	Prints per box (maximum no. Of prints)
CK-K75R	5" Paper Roll & Ink Sheet	3.5" x 5"	360 prints x 2 rolls
		5" x 7"	180 prints x 2 rolls
CK-K76R	6" Paper Roll & Ink Sheet	2" x 6" (x2)	320 prints x 2 rolls
		4" x 6"	320 prints x 2 rolls
		6" x 6"	160 prints x 2 rolls

*1 Does not include data transfer time. The print times per 89 x 127mm (3.5 x 5") and 102 x 152mm (4 x 6") sizes are when dividing the 127 x 178mm (5 x 7") and 152 x 203mm (6 x 8") sizes by two to print the 89 x 127mm (3.5 x 5") and 102 x 152mm (4 x 6") sizes.

*2 Printer drivers for Windows® Vista/7 (64-bit) or Windows® 8 (32-bit, 64-bit) and MAC OS® X will be made available for download at our company's website for printers. Windows XP, Windows Vista, and Windows 7 are registered trademarks of Microsoft Corporation. in the United States and other countries.

*3 Standard values are shown for external dimensions and printing sizes.

• All other company names and product names in this catalog are trademarks or registered trademarks of their respective companies.

Dimensions



Parts

PART NAMES

- Paper strip bin
- Alarm indicator
- Paper ribbon indicator
- Power indicator
- Print outlet
- Open button
- Printing unit
- Door
- Power switch
- Power socket (AC line)
- Fan cover handle for transporting
- USB terminal
- Securing holes for cable ties

Find us on Facebook®
@Mitsubishi-Photo-Imaging

Follow us on Twitter™
@MitsubishiPhoto


Visit our YouTube Channel
@MitsubishiPhotoUSA

eco changes for a greener tomorrow

MITSUBISHI ELECTRIC VISUAL IMAGING SYSTEMS

Professional Product Sales
Phone: 888.307.0388
www.mitsubishi-imaging.com

LITCPK60DW-S

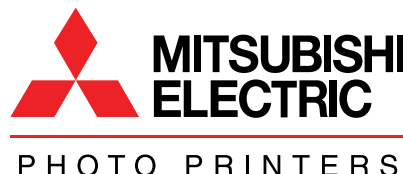

MITSUBISHI ELECTRIC SALES CANADA, INC.

Display & Imaging Solutions Division
Phone: 905.475.7728
www.mitsubishielectric.ca

New publication, effective September, 2013
Specifications subject to change without notice.